


# How to.....? Repair Bow Windows



## Method A

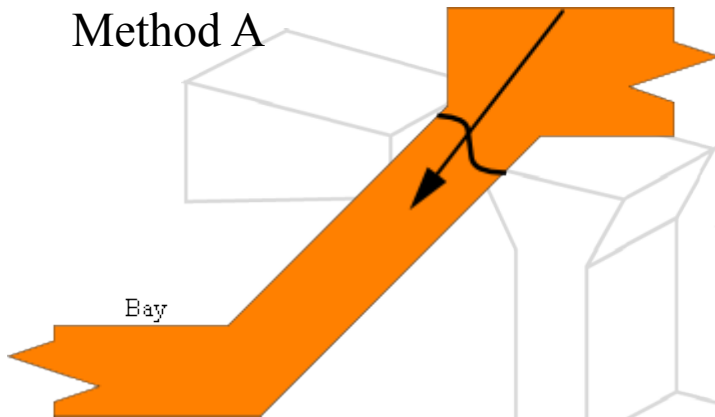


Cracking confined to junction of bay with main wall.

Access available from inside building.

Use Cem Flex to stitch across crack as indicated in CF-02. This method will repair cracking but will not strengthen remainder of bay.

## Method B

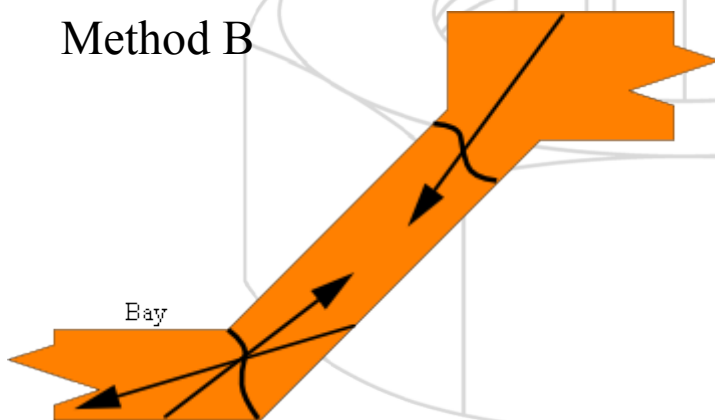

Cracking at junction of bay with main wall and at other corners of brickwork around the bay.

Access available from both inside and outside building.

Use Cem Flex to stitch across crack as indicated in CF-02. This method will repair cracking but will not strengthen remainder of bay.

### Guidance Note :

Depending upon the condition of the masonry and the amount of damage that has occurred it may be necessary to insert Bar Flex around the whole bay (see Standard Detail BF-12) or to use Bow Flex to fix back to the floor/ceiling joists (see Standard Detail BO-03)